

Cabin Air Filters

Application & Installation Guide



WIX
FILTERS
DANA



CABIN AIR FILTER APPLICATIONS


APPLICATION	YEARS	LOCATION	OE PART NUMBER	WIX PART NUMBER	INSTALLATION SHEET
ACURA					
TL, NSX	99-02	Behind Glove Box	80291S84A01 - Honda	24782	11
AUDI					
A4, S4	96-02	Passenger Side Under Hood and Cowl	8A0819439A - VW, Audi	24774	13
TT	99-02	Passenger Side Under Hood and Cowl	1J0819644 - VW	24822	12
BMW					
318i, 328i	98-99	Behind Glove Box	64119069895 or 64111393489 - BMW	24784	N/A
528i	99	Behind Glove Box	64119069895 or 64111393489 - BMW	24784	N/A
M3	99	Behind Glove Box	64119069895 or 64111393489 - BMW	24784	N/A
BUICK					
Century	97-02	Passenger Side Under Hood In Cowl	10406026 or 10261703 - GM (AC)	24780	7
LeSabre	00-02	Passenger Side Under Hood and Cowl	25654414 or CF117 - GM (AC)	24812	6
Regal	98-02	Passenger Side Under Hood and Cowl	10406026 or 10261703 - GM (AC)	24780	7
CADILLAC					
Catera	97-99	Passenger Side Under Hood and Cow	90510338 or 90458294 - GM	24781	N/A
Deville	00-02	Passenger Side Under Hood In Cowl	CF118C - AC DELCO	24813	N/A
Escalade	01-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
CHEVROLET					
Impala	2000	Passenger Side Under Hood and Cowl	10406026 or 10261703 - GM (AC)	24780	7
Monte Carlo	98-00	Passenger Side Under Hood and Cowl	10406026 or 10261703 - GM (AC)	24780	7
Silverado	99-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
Suburban	99-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
Tahoe	99-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
Venture	97-00	In Rear of Glove Box	52482929 or CF100 - GM (AC)	24811	8
CHRYSLER					
Town&Country	00-01	Under Glove Box	82205905 - Mopar	24864	N/A
DODGE					
Caravan	00-01	Under Glove Box	82205905 - Mopar	24864	N/A
FORD					
Contour	95-00	Passenger Side Under Hood and Cowl	FP1 or FP4	24771	3
Escape	01-02	Passenger Side Under Hood and Cowl	YL8418797 - Ford	24816	2
Focus	00-02	Passenger Side Under Hood and Cowl	FP32 - Motorcraft	24808	1
Taurus	96-02	Passenger Side Under Hood and Cowl	FP6 - FP14 - Motorcraft	24773	4
Windstar	99-02	Passenger Side Under Hood and Cowl	FP22 - FP22A - Motorcraft	24807	5
GMC					
Denali	01-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
Sierra Pickup	99-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
CK Pickup	99-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
Yukon	99-02	Under Center of Dash	52485513 or CF104 - GM (AC)	24805	9
HONDA					
Accord	98-02	Behind Glove Box	80291S84A01 - Honda	24782	11
Civic	01-02	Behind Glove Box	80292-S5A-003 or 80292-S5D-A01	24817	10
LINCOLN					
Continental	95-97	Passenger Side Under Hood In Cowl	FP5 - FP16 - Motorcraft	24772	N/A
Continental	98-02	Passenger Side Under Hood and Cowl	FP13 - Motorcraft	24806	N/A

APPLICATION	YEARS	LOCATION	OE PART NUMBER	WIX PART NUMBER	INSTALLATION SHEET
MAZDA					
Tribute	01-02	Passenger Side Under Hood and Cowl	YL8418797 - Ford	24816	2
MERCEDES					
Various	Various	Behind Glove Box	1408350047 - Mercedes	24775	N/A
Various Odor & Particle Filter	97-99	Behind Glove Box	1408350147 - Mercedes	24776	N/A
C & SLK Class	Various	Under Glove Box	2028300018 - Mercedes	24777	N/A
E Class	95-02	Under Glove Box	2108300218 - Mercedes	24778	N/A
E Class	97-01	Under Glove Box	2108300018 or 2108301018 - Mercedes	24783	N/A
MERCURY					
Cougar	98-02	Passenger Side Under Hood and Cowl	FP1 or FP4	24771	3
Mystique	95-00	Passenger Side Under Hood and Cowl	FP1 or FP4	24771	3
Sable	96-02	Passenger Side Under Hood and Cowl	FP6 - FP14 - Motorcraft	24773	4
OLDSMOBILE					
Aurora	01-02	Passenger Side Under Hood and Cowl	25654414 or CF117 - GM (AC)	24812	6
Intrigue	98-00	Passenger Side Under Hood and Cowl	10406026 or 10261703 - GM (AC)	24780	7
Silhouette	97-00	In Rear of Glove Box	52482929 or CF100 - GM (AC)	24811	8
PLYMOUTH					
Voyager	00-01	Under Glove Box	82205905 - Mopar	24864	N/A
SATURN					
L-Series	00-01	Passenger Side Under Hood in Cowl	90464424 - Saturn	24865	N/A
PONTIAC					
Bonneville	00-02	Passenger Side Under Hood In Cowl	25654414 or CF117 - GM (AC)	24812	6
Montana	99-00	In Rear of Glove Box	52482929 or CF100 - GM (AC)	24811	8
Transport	97-98	In Rear of Glove Box	52482929 or CF100 - GM (AC)	24811	8
VOLKSWAGEN					
Beetle	98-02	Passenger Side Under Hood and Cowl	1J0819644 - VW	24822	12
Cabrio	00-02	Passenger Side Under Hood and Cowl	1J0819644 - VW	24822	12
Golf	98-02	Passenger Side Under Hood and Cowl	1J0819644 - VW	24822	12
Jetta	98-02	Passenger Side Under Hood and Cowl	1J0819644 - VW	24822	12
Passat	96-97	Passenger Side Under Hood and Cowl	3A0819644 - VW	24779	N/A
Passat	98-02	Passenger Side Under Hood and Cowl	8A0819439A -VW, Audi	24774	13
VOLVO					
850	93-97	Passenger Side Under Hood and Cowl	1343232 - Volvo	24819	N/A
C70	98	Passenger Side Under Hood and Cowl	1343232 - Volvo	24819	N/A
C70	99-02	Passenger Side Under Hood and Cowl	9171296 or 9184130 - Volvo	24821	N/A
S60	01-02	Behind Passenger Side Interior Kick Panel	9204626 - Volvo	24818	N/A
S70	98	Passenger Side Under Hood and Cowl	1343232 - Volvo	24819	N/A
S70	99-02	Passenger Side Under Hood and Cowl	9171296 or 9184130 - Volvo	24821	N/A
S80	99-02	Behind Passenger Side Interior Kick Panel	9204626 - Volvo	24818	N/A
V70	98	Passenger Side Under Hood and Cowl	1343232 - Volvo	24819	N/A
V70	99-02	Passenger Side Under Hood and Cowl	9171296 or 9184130 - Volvo	24821	N/A
V70	01-02	Behind Passenger Side Interior Kick Panel	9204626 - Volvo	24818	N/A

Tools: Phillips screwdriver
Standard screwdriver

1

- Stop windshield wipers in up position.
- Open hood

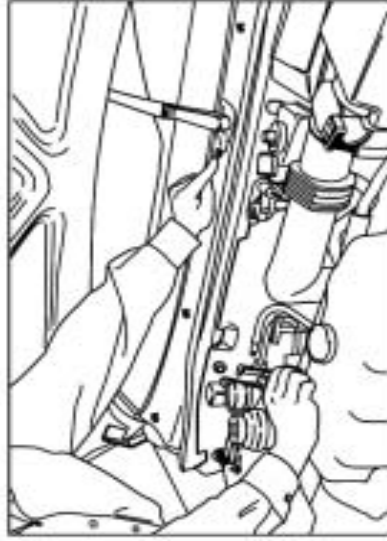


2

- Remove the cap on screw in center of cowl cover.
- Unscrew half way & pull out fitting.
- Unsnap 3 clips on front edge of cover & remove cover.

3

- Either a filter or screen is visible under louver. Flip out front edge of housing & remove the filter or plate.

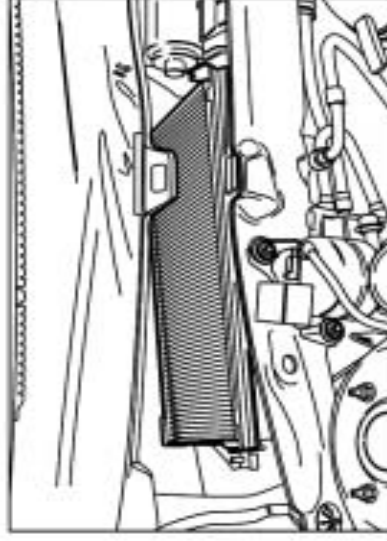

4

- Replace with a clean Cabin Air Filter. Make sure the arrows on the filter are facing up.
- Recip front of housing in place & replace the cowl cover.






Mazda Tribute & Ford Escape from Model Year 2001.

Tools: Phillips screwdriver
Standard screwdriver


1

- Open hood
- On the passenger side of the cowl is the cover plate for the Cabin Air Filter.
- Remove four caps from windshield side of cover plate.

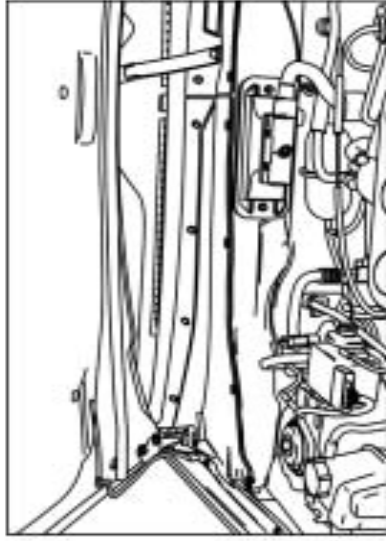


2

- Remove 4 screws.
- Remove 4 fittings from opposite side of cover plate.
- Remove cover plate.

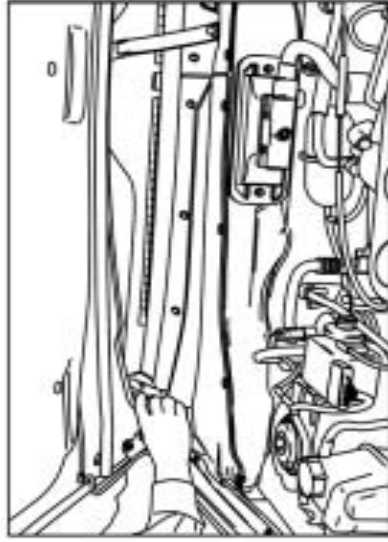

3

- The rain shield is now visible. Remove the rain shield by pulling up & out.

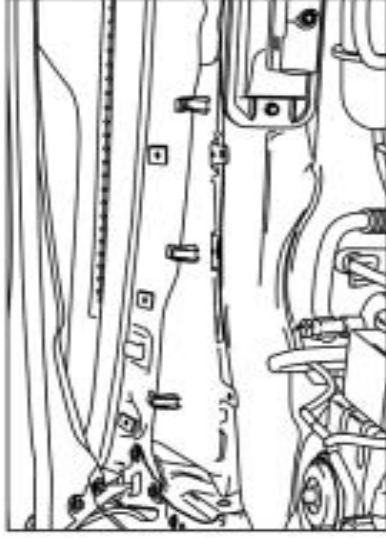

4

- Lift the filter from the housing & replace with a clean Cabin Air Filter.
- Reinsert the rain shield, matching 3 clips on top of shield to indentations in top of sheet metal & reattach cover plate.




Ford Contour, Mercury Mystique from Model Year 1995 Mercury Cougar from Model Year 1998

Tools: Phillips screwdriver
Standard screwdriver


1

- Stop windshield wipers in up position.
- Open hood.

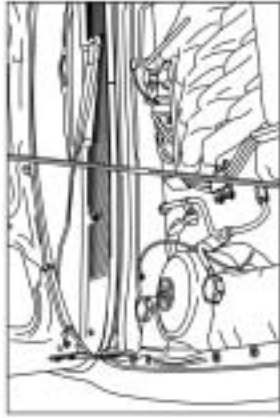


2

- Remove the 3 screw caps from the left, middle & right side of passenger side cowl cover.
- Remove the screws.
- Remove the weather stripping.

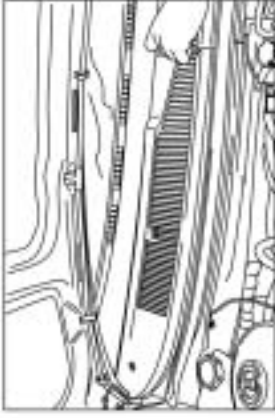

3

- Lift off the passenger side cowl cover.
- Unsnap clip on left side of filter housing.

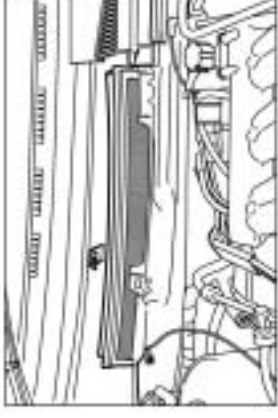

4

- Remove filter frame.



5

- Remove dirty filter from frame and replace with clean Cabin Air Filter.
- Replace frame in housing and fasten clip.
- Replace weather stripping, screws & screw caps.
- Close hood.






Ford Taurus and Mercury Sable from Model Year 1996


1

- Open hood
- Unhook clip on left of passenger side cowl cover & remove.

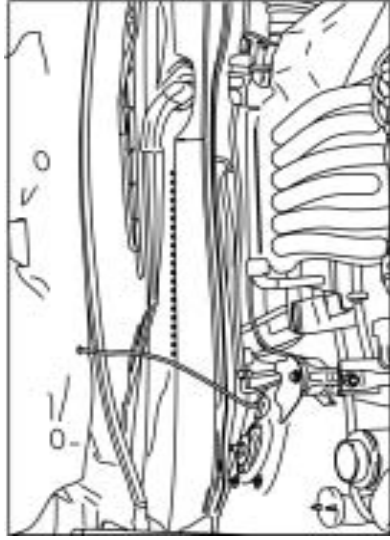

2

- Unclip vacuum hose from left & center of cowl cover.
- Remove passenger side cowl cover.

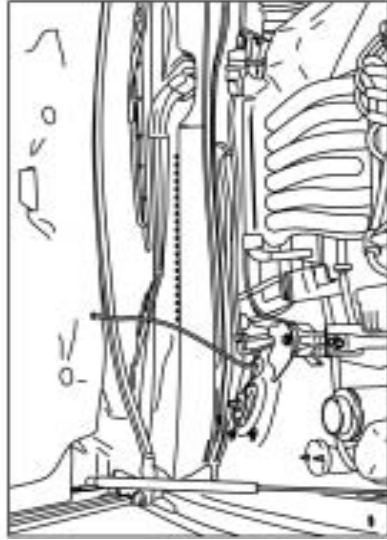


3

- Remove dirty filter & replace with a clean Cabin Air Filter.
- Replace the cowl cover.
- Reclip vacuum hose.
- Rehook clip on passenger side cowl cover.
- Close hood.



1

- Open hood
- The cover for the Cabin Air Filter is located on the passenger side of the cowl.
- Unsnap cover & remove.

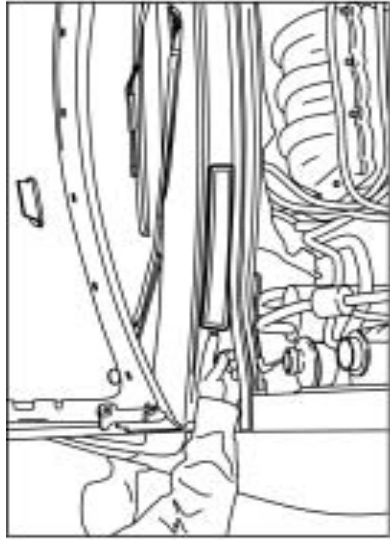


3

- Install a clean Cabin Air Filter in the housing.



2

- Remove the filter from the housing.

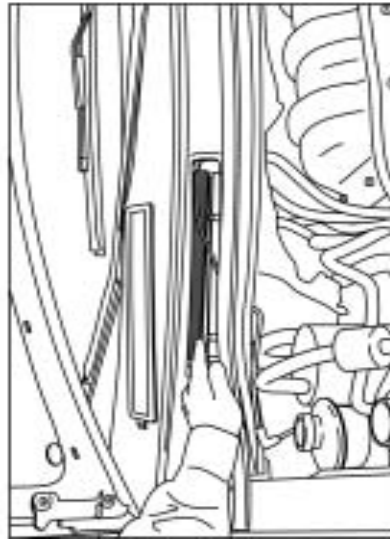

4

- Push the filter down until it is firmly sitting in the housing.
- Reattach the cover.





Bonneville, LeSabre and Deville from Model Year 2000 Aurora from Model Year 2001

Tools: Phillips screwdriver

1

- Open hood
- The cover for the Cabin Air Filter is located on the passenger side in the cowl.



2

- Unsnap the cover and the filter is visible.
- Locate the lever on the left side of the housing. Push the lever out and remove the filter.



3

- Replace with a clean Cabin Air Filter by depressing the lever in the housing & sliding the filter into the double track.
- Replace cover.




Buick Century, Regal, Oldsmobile Intrigue from Model Year 1997

Chevrolet Impala & Monte Carlo from Model Year 2000.

1

- Put windshield wipers in up position.
- Open hood.
- Remove weather stripping from passenger side of cowl.

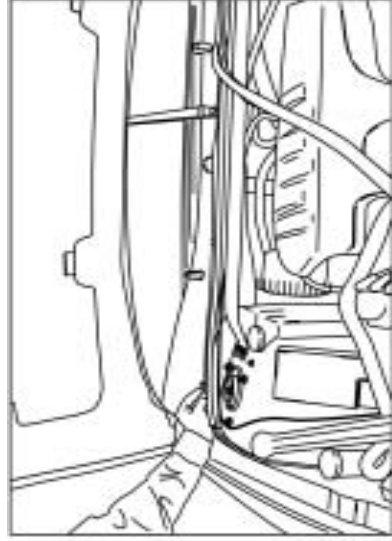

Tools: Standard screwdriver

3

- Unscrew & remove fittings on either side of cowl.
- Remove center screw cap.
- Take out cowl cover.




2

- Unclip wiper fluid hose in 3 places and remove.



4

- Remove filter & replace with clean Cabin Air Filter.
- Reattach the cowl cover.
- Snap wiper fluid hose in place.
- Replace weather stripping.

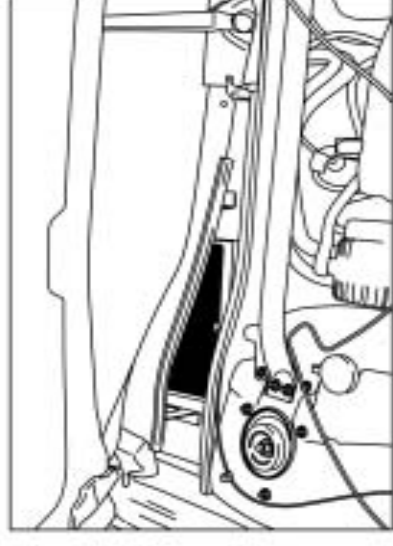




Olds Silhouette, Chevrolet Venture, Pontiac Transport & Montana Model Years 1997-2000

1

- Open glove compartment
- At the rear of the compartment is a cover panel. Lift up & remove.

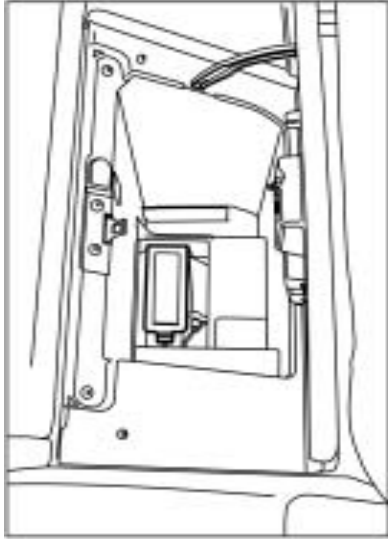

3

- Remove first filter. Slide second filter from the left into the opening & remove.



2

- Open the access door to the filter by swinging it open to the right.



4

- Replace with 2 clean Cabin Air Filters.
- Reattach the cover panel.
- Close glove compartment.



Chevrolet Silverado, Suburban, Tahoe & Sierra and GMC Yukon, from Model Year 1999

GMC Denali & Cadillac Escalade from Model Year 2001

Tools: 7mm Socket
9mm Socket


1

- Open door to passenger side of vehicle.




3

- The door to the Cabin Air Filter is now visible. Remove screw in door and unhinge.

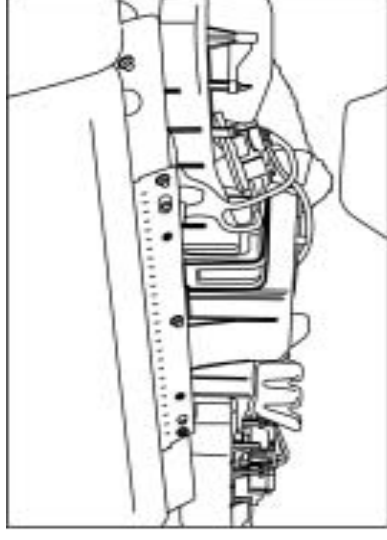

2

- Under glove compartment is a kick plate cover held in place by 4 screws. Remove the screws and take off cover.

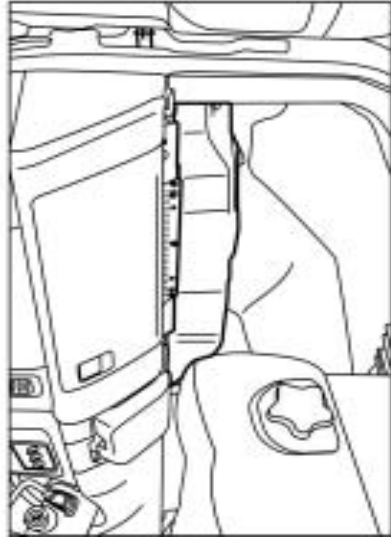

4

- Remove the first filter by pulling straight down.
- Remove the second filter by sliding forward and pulling down.
- Replace with clean Cabin Air Filters.
- Reattach door.
- Reattach kick plate cover.



1

- Open glove compartment.



2

- Remove hinge tabs on either side of glove compartment.



3

- Flip down the glove compartment and the access door is visible.



4

- Open access door to the right & remove.
- Pull out the first filter & frame.
- Slide the second filter & frame to the left and pull out.



5

- Remove dirty filter from each frame and replace with clean Cabin Air Filters.
- Reinstall both filters in housing.
- Reattach the access door.
- Replace the hinge tabs.
- Close the glove compartment.



Tools: Phillips screwdriver
Standard screw driver

1

- Open glove compartment.
- Remove 2 locking tabs from either side of compartment.
- Remove 3 screws on left, center & right of compartment.
- Close compartment.



2

- Remove access panel from right side of compartment.
- Remove 2 screws under access panel.
- Remove access panel in center of console under radio.
- Remove screw on right side under this panel.



3

- Remove access panel under glove compartment.
- Remove 2 screws on underside of glove compartment & 1 screw on metal bar.
- Remove glove compartment, disconnecting light wire on left side.



4

- Remove remaining 2 screws on either side of metal bar. Remove bar.
- The access door to the filters is now visible.
- Pull up on access door to release & remove.



5

- Pull out first filter in housing & slide second into opening to remove.
- Replace with clean Cabin Air Filters.
- Reverse steps to complete filter changeout.





VW Jetta, Golf A4, Beetle, & Audi TT from Model Year 1998 Golf A3 from Model Year 1994

VW Beetle installation instructions may vary

Tools: Phillips screwdriver

- Open hood


1

- Remove weather stripping from passenger side.
- Remove 4 screws from cover to Cabin Air Filter.




- Remove cover by pulling towards front of vehicle.

2

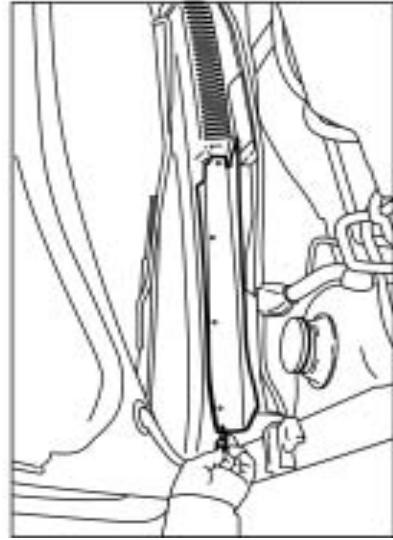


- Remove filter & top filter housing plate by depressing the 2 tabs on the top housing plate.
- Lift filter & pull out.

3

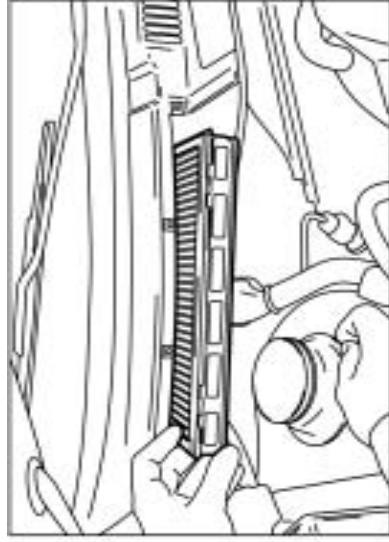

- Remove used filter from top housing plate & replace with clean Cabin Air Filter.
- Make sure to line up the 4 notches on the top side of the filter with the ribs on the top housing plate.
- Replace filter & top housing plate by sliding into place & pushing down until the two tabs click into place.

4

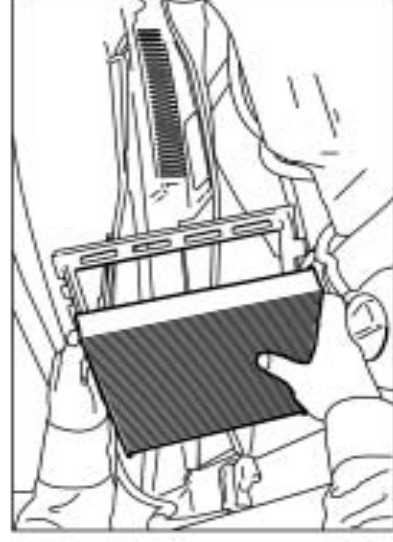

- Reattach cover.

1

- Open hood
- Notice the cover for the Cabin Air Filter is on the cowl on the passenger side.
- Remove the screw from cover.



3

- Remove by pushing up on the filter to loosen from housing & then pulling out toward the front of the vehicle.



2

- Remove cover by pulling toward the front of the vehicle. The filter is now visible.



4

- Replace with clean Cabin Air Filter.
- Replace cover by lining up the notches on either side of the cover plate to the grooves in the filter housing.
- Replace the screw in the cover plate.

